




STAINLESS STEEL WIRE SS316

SOLD IN REELS ONLY

- Suitable for marine and premium industrial applications
- Manufactured in Korea from high quality POSCO stainless steel rods
- Highly polished finish
 - Multiple annealing
 - Ultrasonic bath process to thoroughly clean
 - Descaling process to decontaminate
- Detailed material- specific testing is conducted on all of our wire in our in-house-state-of-the-art equipment chemical metallurgical laboratory

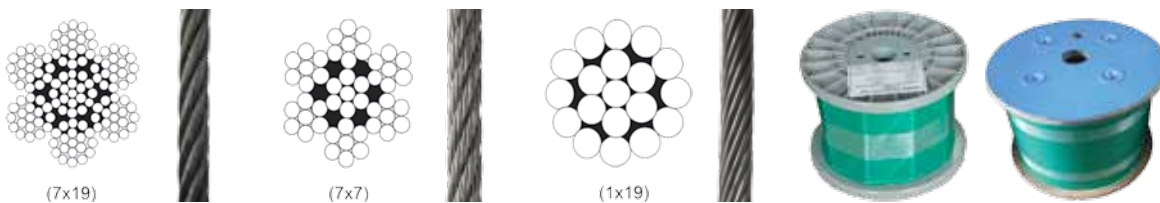


Part No. 316	Size mm	M/Reel	Breaking Strength (min) Kgs
44619	M1.6 (1x19)	305	214
44620	M2.0 (1x19)	305	335
44621	M2.5 (1x19)	305	525
44493	M3.2 (1x19)	305	849
44653	M3.2 (1x19)	1000	849
44622	M4.0 (1x19)	305	1339
44623	M5.0 (1x19)	305	2098
44708	M6.0 (1x19)	305	2876
44624	M2.0 (7x19)	305	250
44625	M2.5 (7x19)	305	389
44494	M3.2 (7x19)	305	612
44626	M4.0 (7x19)	305	959
44627	M5.0 (7x19)	305	1489
44610	M6.0 (7x19)	305	2149
44628	M10.0 (7x19)	305	5966
44629	M1.6 (7x7)	305	168
44630	M2.0 (7x7)	305	260
44631	M2.5 (7x7)	305	399
44492	M3.2 (7x7)	305	665
44654	M3.2 (7x7)	1000	665
44632	M4.0 (7x7)	305	1039
44633	M5.0 (7x7)	305	1619
44709	M6.0 (7x7)	305	2328

STAINLESS STEEL WIRE SS316

SOLD IN REELS ONLY

- Economical industrial applications
- Grade 304 is available upon request only

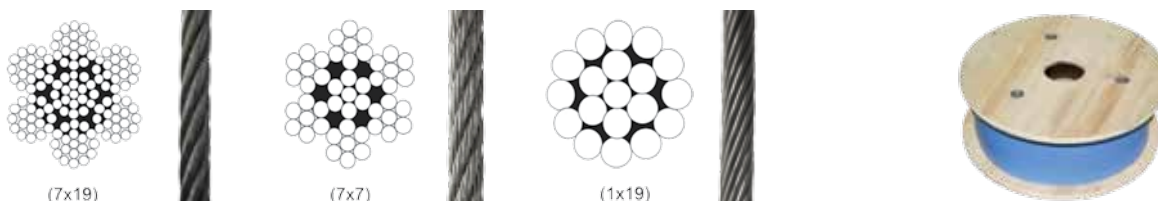

Part No. 316	Size mm	M/Reel	Breaking Strength (min) Kgs
44010	M1.6 (1x19)	305	215
44114	M1.6 (1x19)	1000	215
44011	M2.0 (1x19)	305	335
44012	M2.5 (1x19)	305	525
38113	M3.2 (1x19)	305	860
43656	M4.0 (1x19)	305	1345
44015	M5.0 (1x19)	305	2100
43729	M6.0 (1x19)	305	3025
44016	M8.0 (1x19)	305	5380
44017	M10.0 (1x19)	305	8030
44522	M2.0 (7x19)	305	210
44523	M2.5 (7x19)	305	330
31140	M3.2 (7x19)	305	540
43676	M4.0 (7x19)	305	850
44006	M5.0 (7x19)	305	1330
44007	M6.0 (7x19)	305	1910
44008	M8.0 (7x19)	305	3400
44009	M10.0 (7x19)	305	5310
44013	M1.6 (7x7)	305	145
43699	M2.0 (7x7)	305	230
44014	M2.5 (7x7)	305	350
37479	M3.2 (7x7)	305	580
43675	M4.0 (7x7)	305	920
44518	M5.0 (7x7)	305	1430
44519	M6.0 (7x7)	305	2070
44520	M8.0 (7x7)	305	3680
44521	M10.0 (7x7)	305	5750